

ArgusCore™

OpenGL® ES 2.0 / GL 1.3 Graphics Drivers for Safety Critical

FEATURES AND BENEFITS

- Configurable and scalable power and performance management
- Specialized BIT integrated into driver; monitors registers and GPU integrity
- Integrated and compatible with popular safety critical HMI tools, SCADE, iData, GL Studio, VAPS XT
- CoreAVI drivers contains no open source and no 3rd party software
- Supports multicore partitions, hypervisor and Guest OS configurations
- Customizable display controller interface to support variable sync modes and custom resolutions
- Supports RTOS, including Wind River® VxWorks®, QNX® OS, GreenHills® INTEGRITY, Lynx® Software MO-SA.ic, Linux® and configurable for proprietary RTOS

INTRODUCTION

CoreAVI's ArgusCore ES2/GL1.3 a suite of real time OpenGL ES 2.0 and OpenGL 1.3 scalable graphics drivers that are designed to enable the best performance capabilities of lower and higher powered graphics processors for embedded applications.

ArgusCore ES2

CoreAVI's ArgusCore ES2 drivers are a superset of Khronos' OpenGL ES 2.0 API specification (OpenGL for embedded accelerated 3D graphics). The ArgusCore ES2 graphics libraries support a programmable graphics rendering pipeline enabling applications to take greater advantage of the performance gains provided by modern graphics processors shader engines while minimizing the cost and power consumption of graphics subsystems.

ArgusCore GL1.3

CoreAVI's ArgusCore GL1.3 drivers are a superset of OpenGL 1.3 specification for a graphics system. The ArgusCore GL1.3 graphics libraries are implemented to support a fixed function graphics rendering pipeline for embedded applications.

Modular and Adaptable Architecture

Based on a highly modular architecture, CoreAVI can optimize for specific applications and quickly adapt the OpenGL libraries to new hardware platforms, operating systems and even add customer specific features. Video capture enhancements, display controller settings and deterministic memory management modules can be quickly modified to address unique device specific requirements.

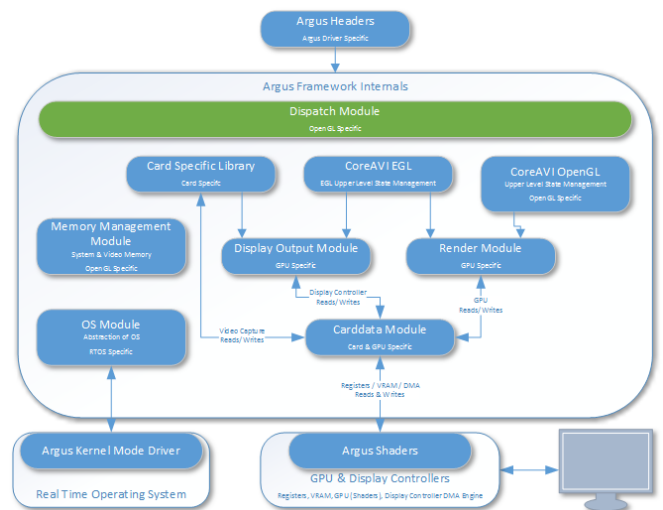


Figure 1: ArgusCore ES 2.0 / GL 1.3

The information contained in this document is for informational purposes only and is subject to change without notice. While every precaution has been taken in the preparation of this document, it may contain technical inaccuracies, omissions and typographical errors, and CoreAVI is under no obligation to update or otherwise correct this information. CoreAVI makes no representations or warranties with respect to the accuracy or completeness of the contents of this document, and assumes no liability of any kind, including the implied warranties of non-infringement, merchantability or fitness for particular purposes, with respect to the operation or use of CoreAVI hardware, software or other products described in this document. No license, including implied or arising by estoppel, to any intellectual property rights is granted by this document. Terms and limitations applicable to the purchase or use of CoreAVI's products are as set forth in a signed agreement between the parties. CoreAVI, the CoreAVI tracer logo, ArgusCore™ and combinations thereof are trademarks of CoreAVI. PCIe and PCI Express are registered trademarks of PCI-SIG Corporation. ARM and Cortex are registered trademarks of ARM Limited in the UK and other countries. Other product names used in this publication are for identification purposes only and may be trademarks of their respective companies.